


IMPACT MIRACLE vibration control end mill series




# VF-45VB

“Variable curve” radius cutting edges for difficult-to-cut materials.

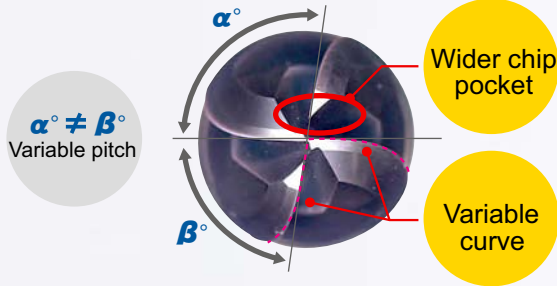

- Newly designed radius cutting edges reduce vibration.
- Suitable for difficult-to-cut materials and thin plate machining.

### Vibration Resistance Comparison

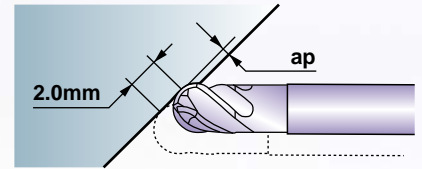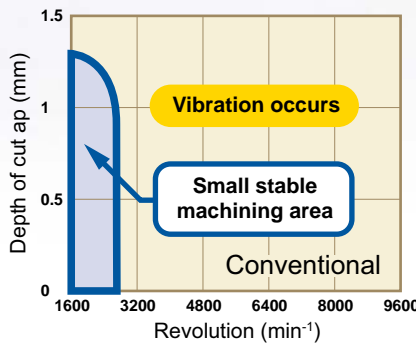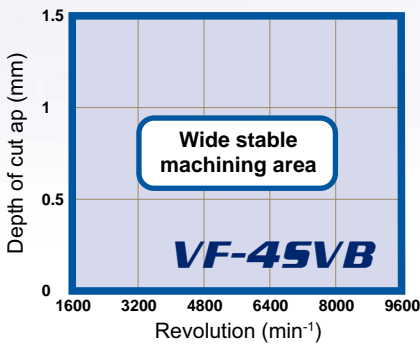

End mill	VF4SVBR0500 (R5)
Work material	JIS SUS304
Revolution	1600-9600min <sup>-1</sup>
Feed rate	580-2300mm/min (0.06mm/tooth)
Cutting fluid	Emulsion

## VF-45VB

Ball nose, Short cut length, 4 flute, Variable curve



R ≤ 6 ±0.01  
R > 6 ±0.02



D1 ≤ 12 0 - -0.02  
D1 > 12 0 - -0.03




D4 = 6 0 - -0.008  
8 ≤ D4 ≤ 10 0 - -0.009  
12 ≤ D4 ≤ 16 0 - -0.011  
D4 = 20 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
○	○			⊙	⊙		



Helix angle

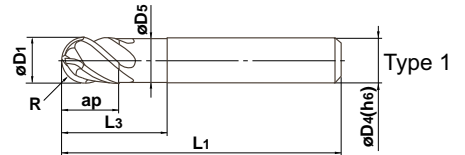

- Impact Miracle end mill with variable curve ensures stable machining of difficult-to-cut materials.

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
VF4SVBR0300	3	6	9	15	5.85	50	6	4	●	1
R0400	4	8	12	20	7.85	60	8	4	●	1
R0500	5	10	15	25	9.7	70	10	4	●	1
R0600	6	12	18	30	11.7	75	12	4	●	1
R0800	8	16	24	40	15.5	90	16	4	●	1
R1000	10	20	30	50	19.5	100	20	4	●	1

● : Inventory maintained.

## VF-45VB


Ball nose, Short cut length, 4 flute, Variable curve

Work material	Carbon steel, Alloy steel (-45HRC) JIS S55C, SCM					Austenitic stainless steel JIS SUS304, SUS316 Titanium alloy JIS Ti-6Al-4V					Heat resistant alloy Inconel etc.				
	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut $a_p$ (mm)	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut $a_p$ (mm)	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut $a_p$ (mm)
	Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)	Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)		Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)	Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)		Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)	Revolution ( $\text{min}^{-1}$ )	Feed rate (mm/min)	
R 3	16000	4800	10600	2100	0.5	12000	3200	8000	1400	0.5	3200	500	2100	210	0.25
R 4	12000	4300	8000	1900	0.8	9000	3200	6000	1400	0.8	2400	430	1600	190	0.4
R 5	9600	4100	6400	1800	1	7200	3000	4800	1300	1	2000	420	1300	180	0.5
R 6	8000	4000	5300	1800	1.2	6000	3000	4000	1300	1.2	1700	350	1100	150	0.6
R 8	6000	3200	4000	1400	1.6	4500	2500	3000	1100	1.6	1200	300	800	130	0.8
R10	4800	3000	3200	1300	2	3600	2300	2400	1000	2	1000	250	640	100	1

Depth of cut		
	R:Radius	R:Radius

- 1) When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective. When cutting heat-resistant alloys, the use of non water-soluble cutting fluid is recommended.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) This end mill has a larger effect on controlling vibration when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate.
- 3)  $\alpha$  is the inclination angle of the machined surface.



## Cutting performance

### Excellent chip disposal!

**VF-45VB**

Conventional

Chip packing

2280 (fz=0.04mm/tooth)    3430 (fz=0.06mm/tooth)    4580 (fz=0.08mm/tooth)    Feed rate (mm/min)

End mill	VF4SVBR0500 (R5)
Work material	JIS Ti-6Al-4V
Revolution	14300 $\text{min}^{-1}$
Feed rate	2280-4580mm/min
Cutting fluid	Emulsion

**For Your Safety**

- Don't handle tools and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

## MITSUBISHI MATERIALS CORPORATION

### MMC METAL SINGAPORE PTE LTD

10, Arumugam Road #04-00, Lion Industrial Building A, 409957, Singapore  
 Tel: +65-6743-9370 Fax: +65-6749-1469 E-mail: mmcmetal@mms.com.sg  
 Mitsubishi Carbide Home Page or contact our regional distribution centres below.

**Bangkok Representative Office**

8th Floor Regent House Building, 183 Rajdamuri Road, Lumpin, Pathumwan, Bangkok 10330, Thailand  
 Tel: +66-2651-9800 Fax: +66-2651-9803

Mitsubishi Carbide Home page : <http://www.mitsubishicarbide.com>  
 (Tools specifications subject to change without notice.)