


# Safety notice for V10000

The V10000 face mill has been dynamically balanced and can be used for high speed machining applications.. However to ensure overall safety the following steps need to be carried out by the purchaser.

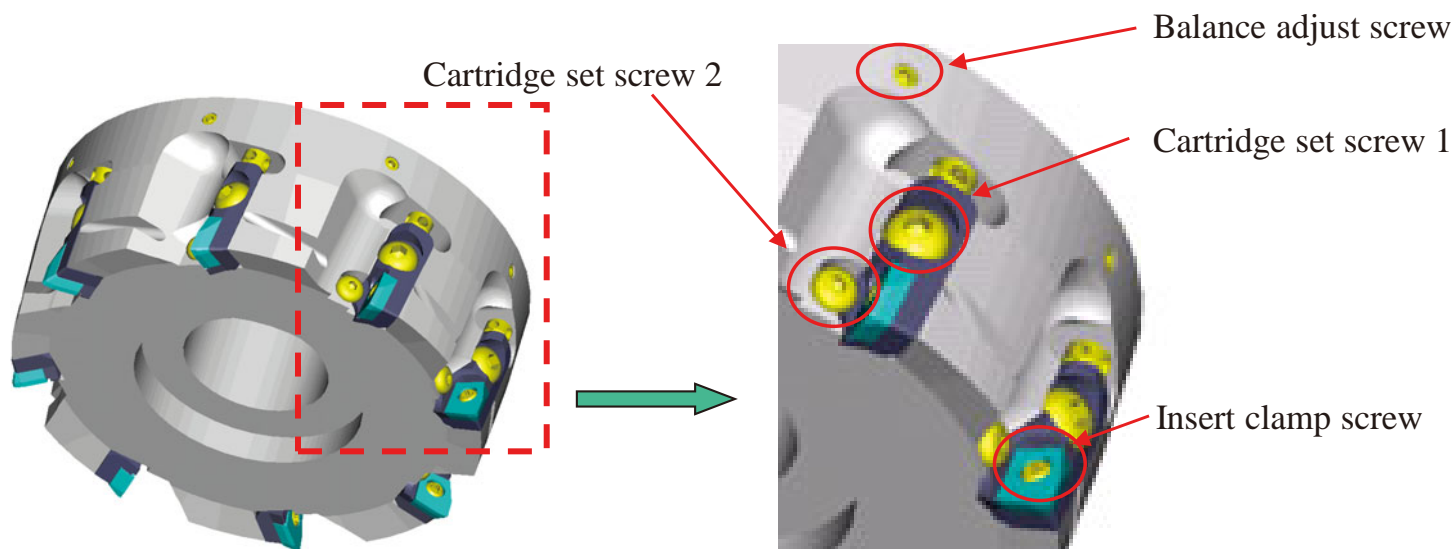

1. Please use this cutter with the machine tool that has the safety facility like the splash guard in order to keep safety.
2. When changing the inserts, check that the cartridge set screws 1 & 2 are not loose. Additionally ensure that all 3 screws have been tightened to the correct torque setting.
3. Do not tamper or adjust the balance adjust screw.
4. When machining, there maybe a possibility that the chips can wear away the body of the tool. If this occurs, it can effect the balance of the tool, and as such do not use in this state.
5. The insert clamp screws must be changed periodically. The recommendation is to change the clamp screw after 3 insert changes.