


**DLC Coating End Mill**

# ***DLC-2MA***

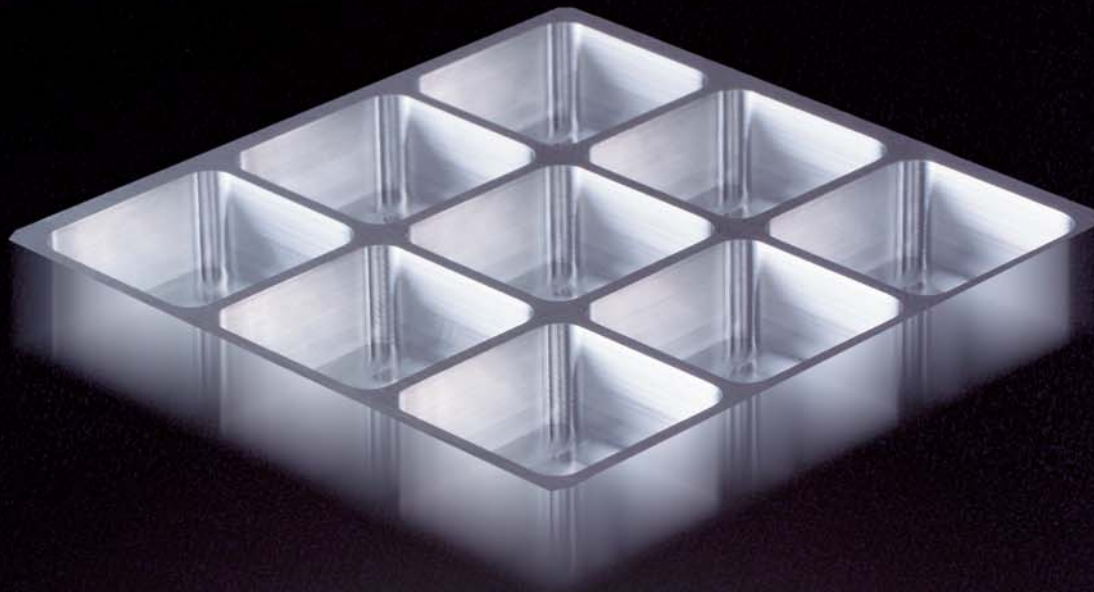

## **DLC Coating End Mill**

**High performance and long tool life for non-ferrous materials**



# CARBIDE END MILLS

# DLC-2MA

Medium, 2 flute, For Non-ferrous material

## Feature

DLC coated end mills is suitable for machining of non-ferrous materials.

Due to applying DLC coating with superior anti-adhesion, high performance is realized in milling of non-ferrous materials such as Al-alloy, GFRP, CFRP, Copper-alloy and graphite.

Applying for new developed DLC coating.

The hardness of film such as diamond is realized with high adhesion.

Adhesion used to be the weak point of DLC coating. We developed original DLC coating with obtains superior adhesion level (Co-developed with ShinMaywa Co.).

High performance shows with suitable design and applying for original carbide material.


Applying most suitable original design for non-ferrous materials and carbide material, low cutting force and good chip disposability are realized.

## Close hardness Diamond

### Characteristic of DLC coating

	<b>DLC</b>	Competitor's DLC	Diamond	TiN
Hardness (HV)	<b>6,000—7,000</b>	1,000—7,000	7,000—10,000	2,000
Wear Coefficient	<b>0.1</b>	0.1	0.4	0.4

## Machining example

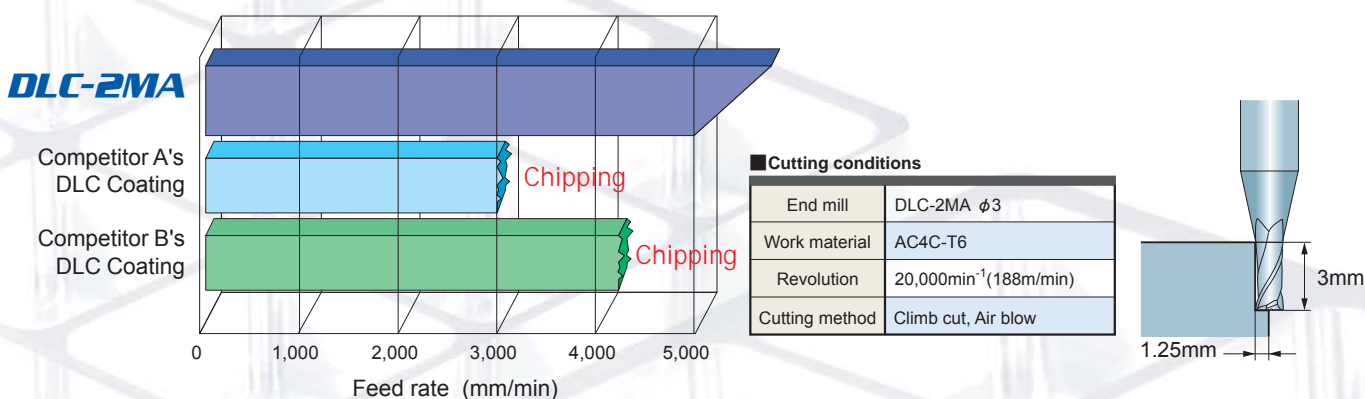


## Performance report (1)

Al-alloy

**Tool life is 3 times**  
as competitor's DLC coating

### Cutting conditions

End mill	DLC-2MA $\phi 1$
Work material	A5052
Revolution	10,000min <sup>-1</sup> (31m/min)
Feed rate	150mm/min
Cutting method	Slotting, Oil



Number of work piece  
**3**  
items

250mm

**DLC-2MA**

Number of work piece  
**1**  
items

Coating  
exfoliation

Competitor's DLC Coating

# CARBIDE END MILLS

## DLC-2MA

Medium, 2 flute, For Non-ferrous material



$D_1 \leq 12$  -0.020  
 $12 < D_1$  -0.030




$D_1 < 3$

$3 \leq D_1$

$D_1 < 3$

$3 \leq D_1$

● Due to applying for DLC coating with superior anti adhesion, high performance is realized in milling of non-ferrous materials such as Al-alloy, GFRP, CFRP, Copper-alloy and graphite.

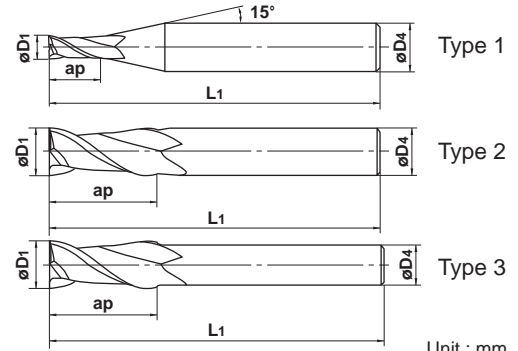

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flute N	Stock	Type
DLC2MAD0100	1	2.5	40	4	2	●	1
D0150	1.5	4	40	4	2	●	1
D0200	2	6	40	4	2	●	1
D0250	2.5	8	40	4	2	●	1
D0300	3	8	45	6	2	●	1
D0400	4	11	45	6	2	●	1
D0500	5	13	50	6	2	●	1
D0600	6	13	50	6	2	●	2
D0800	8	19	60	8	2	●	2
D1000	10	22	70	10	2	●	2
D1200	12	26	75	12	2	●	2
D1400	14	26	75	12	2	●	3
D1500	15	30	80	16	2	●	1
D1600	16	32	90	16	2	●	2
D1800	18	32	90	16	2	●	3
D2000	20	38	100	20	2	●	2

● : Inventory maintained.

## Performance report (2)

### GFRP (Glass Fiber Reinforced Plastic)


## High efficiency milling

### DLC-2MA



Cutting length 1,064m

Number of work piece  
**12** items




(Ti,Al)N Coating



Cutting length 266m


Number of work piece  
**3** items




#### Cutting conditions

End mill	DLC-2MA $\phi$ 6
Work material	GFRP
Revolution	$8,000\text{min}^{-1}$ (151m/min)
Feed rate	2,000mm/min
Cutting method	Air blow

### Side milling

Work material	Aluminum alloy A7075		Aluminum cast AC4B	
Cutting speed	300m/min		240m/min	
Dia. (mm)	Revolution (min <sup>-1</sup> )	Feed rate (mm/min)	Revolution (min <sup>-1</sup> )	Feed rate (mm/min)
1	40,000	600	40,000	460
2	40,000	1,100	38,000	850
3	32,000	1,400	25,000	950
4	24,000	1,500	19,000	1,000
5	19,000	1,600	15,000	1,000
6	16,000	1,900	13,000	1,100
8	12,000	1,900	9,500	1,200
10	9,500	1,900	7,600	1,200
12	8,000	1,900	6,400	1,200
16	6,000	1,900	4,800	1,200
20	4,800	1,500	3,800	1,000
Depth of cut	$\leq 0.2D$ ( $D < \phi 3$ ) $\leq 0.5D$ ( $D \geq \phi 3$ ) 		$\leq 1D$ D: Dia.	

### Slotting

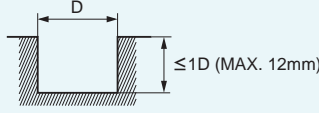Work material	Aluminum alloy A7075		Aluminum cast AC4B	
Cutting speed	240m/min		200m/min	
Dia. (mm)	Revolution (min <sup>-1</sup> )	Feed rate (mm/min)	Revolution (min <sup>-1</sup> )	Feed rate (mm/min)
1	40,000	460	40,000	350
2	38,000	850	32,000	550
3	25,000	950	21,000	600
4	19,000	1,000	16,000	650
5	15,000	1,000	13,000	700
6	13,000	1,100	11,000	750
8	9,500	1,200	8,000	800
10	7,600	1,200	6,400	800
12	6,400	1,200	5,300	800
16	4,800	1,000	4,000	720
20	3,800	970	3,200	660
Depth of cut				

- 1) If the rigidity of the machine or the work material installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) For milling of GFRP, please reduce the revolution and feed rate to 50% of the table figure (Al-alloy).  
Please adjust the depth of cut according to the quality of GFRP.
- 4) Water-soluble cutting fluid is recommended.
- 5) Climb cut is recommended for side milling.

## MITSUBISHI MATERIALS CORPORATION

MITSUBISHI MATERIALS CORPORATION

Overseas Sales Dept, Asian Region  
 KFC bldg., 8F, 1-6-1 Yokoami, Sumida-ku, Tokyo 130-0015, Japan  
 TEL +81-3-5819-8771 FAX +81-3-5819-8774

Overseas Sales Dept, European & American Region  
 KFC bldg., 8F, 1-6-1 Yokoami, Sumida-ku, Tokyo 130-0015, Japan  
 TEL +81-3-5819-8772 FAX +81-3-5819-8774

<http://www.mitsubishicarbide.com/en/>  
 (Tools specifications subject to change without notice.)