

For Aluminum and Difficult-to-cut Materials

Series  
expansion,  
**GL** breaker!**BXD**

# Multi functional milling cutters

**BXD** range of milling cutters for high performance machining of aluminum alloys and heat resistant materials.

■ Low resistance geometry and inserts with a rigid tool body.  
High aluminum removal rates of more than 3,000 cc/min.

■ **LC15TF**

New DLC-coated inserts for outstanding aluminum alloy machining performance.

■ New offset shank type for deeper milling!

■ New low resistance **GL** breaker for aluminium alloys!



**GL** breaker




# Milling Cutters for Aluminum and Difficult-to-cut Materials

# BXD

## Features

## Low Resistance & High Rigidity Inserts


Specially designed inserts for **BXD** cutters to give excellent performance and high efficiency milling on a wide range of materials.

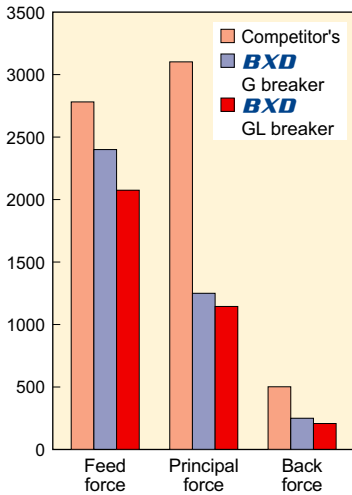

### Cutting resistance of BXD

<Cutting conditions>  
 Workpiece : JIS A6061  
 Cutting speed : 1,000m/min  
 Width of cut : 60mm  
 Depth of cut : 2.0mm


**GL breaker** **NEW**  
 GL breaker achieved a 20% lower cutting resistance compared to the G type breaker.  
 (When machining aluminium alloys)



Double phased helical rake angles


Helical flank

Concave cutting edge



### Fracture resistance of BXD

<Cutting conditions>  
 Workpiece : JIS S55C  
 Cutting speed : 160m/min  
 Width of cut : 5mm  
 Depth of cut : 5mm  
 Insert : XDGT1550PDER-G08 (VP15TF)

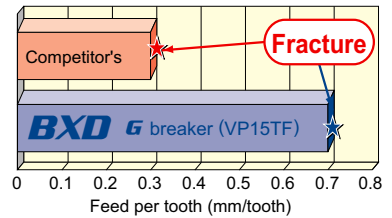

## Multi functional milling

**BXD** for excellent ramping and overall performance.

**① Shoulder milling**

**② Ramping**  
 BXD4000 with  $\phi 25$ mm ...  
 20° ramping angle  
 BXD7000 with  $\phi 40$ mm ...  
 13° ramping angle.

**③ Pocketing**  
 No need for pre-machined holes when pocketing.  
 Up to 5mm sinking depth is possible.

**④ 3D copying**

**⑤ Slotting**

**⑥ Face milling**



**⑦ Helical cutting**

# Grade Features

## LC15TF

Highly wear and fracture resistant micro-grain cemented carbide **TF15** coupled with Mitsubishi's unique, weld resistant DLC coating provides better surface finishes and enables stable, high-grade machining without burrs. **LC15TF** for both wet and dry machining.


### ● Dry machining example in A5052

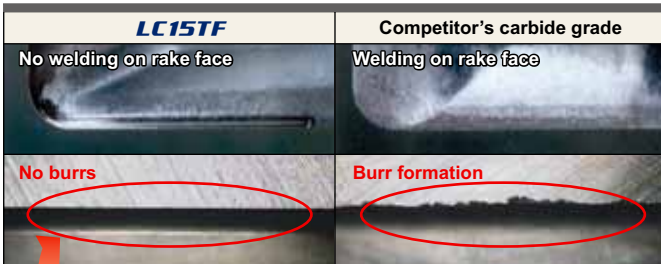

#### <Cutting conditions>

Holder : BXD4000R322SA32S  
 Insert : XDGT1550PDFR-G08  
 Workpiece : JIS A5052  
 Cutting speed : 200m/min  
 Feed per tooth : 0.10mm/tooth  
 Depth of cut : ap=5.0mm, ae=8.0mm  
 Cutting time : 30 min  
 Dry, Down cutting

## MIRACLE<sup>®</sup> coated VP15TF



MIRACLE<sup>®</sup> coated (Al,Ti)N

Micro-grain cemented carbide **TF15**


Wear and fracture resistant **TF15** substrate coupled with MIRACLE coating. For high oxidation resistance and adhesion strength to improve tool life on a wide range of difficult to cut materials.

## TF15

Micro-grain cemented carbide with superior resistance to wear and fracturing. **TF15** ensures stable cutting and efficient machining of aluminum alloy. The special mirror treatment on the rake face prevents chip welding for reliability and longer tool life.

# Secure High-revolution Milling!




Specially designed screws and Mitsubishi's proprietary "Anti Fly Insert" mechanism (AFI mechanism) guarantees secure and safe high revolution milling.

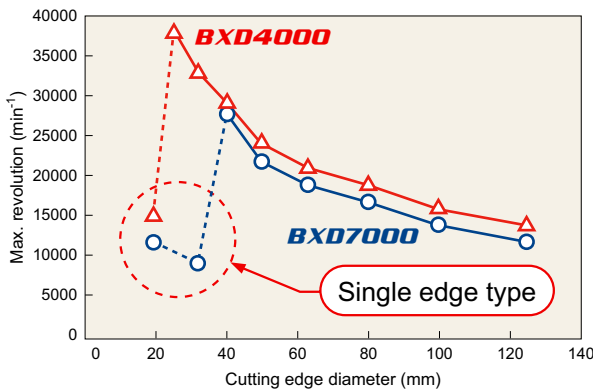

AFI mechanism

# Excellent Wall Accuracy


Specially designed G-class inserts with a helical cutting edge for excellent wall accuracy.

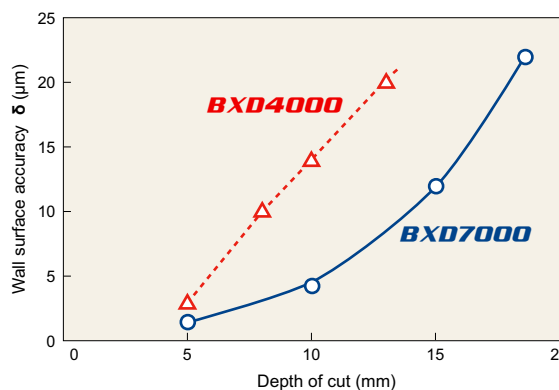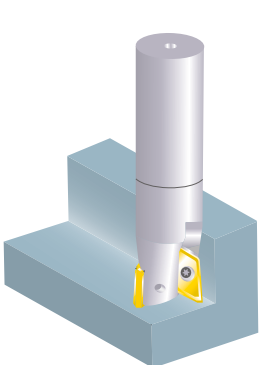

Data obtained from performance tests with BXD4000R252SA25 and BXD7000R402SA20S  
 Nose radius : R1.6  
 Revolution : 20,000min<sup>-1</sup>  
 Feed per tooth : 0.2mm/tooth  
 Width of cut : 3mm  
 Workpiece : JIS A7075-T6  
 Wet cutting  
 Wall surface accuracy varies depending on the diameter of the tool.

# BXD

## Arbor type

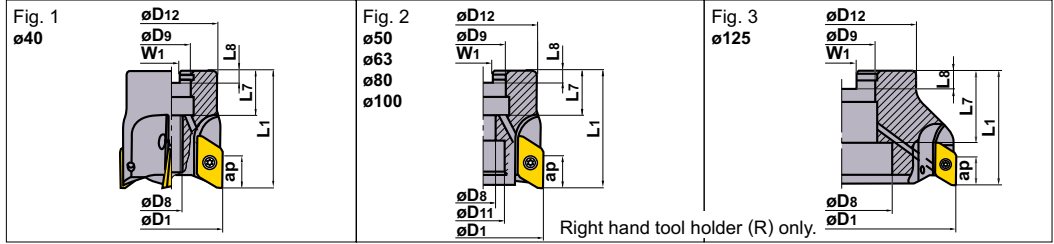

Right hand tool holder (R) only.

## Set bolt

The following clamp bolts are supplied with respective cutter

Diameter		Set Bolt Order Number	Geometry
BXD4000	BXD7000		
ø40	-	LS24H	
-	ø50	HSC08030H	
ø50, ø63	ø63	10030H	
ø80	ø80	12035H	
ø100	ø100	16040H	
ø125	ø125	MBA20040H	

Light Alloy	Cast Iron	General Steel	Stainless Steel	Hardened Steel

Type	Insert Corner Re	Order Number	Stock	Number of Teeth	Dimensions (mm)								Weight (kg)	Max. Depth of Cut ap	Max. Ramping Angle (°)	Max. Allowable Revolution (min <sup>-1</sup> )	Figure					
					R	D1	L1	L7	L8	D8	W1	D9							D11	D12		
BXD4000	A 0.4   3.2	BXD4000-040A03RA	●	3	40	50	18	5.6	M8	8.4	16	-	32	0.3	15	9	29,000	1	TS4SL	①TKY15W	XDGT1550 PDFR-G	
		-050A04RA	●	4	50	50	20	6.5	11	10.4	22	17	41	0.4	15	6	24,000	2	TS4SL	①TKY15W		
		-063A05RA	●	5	63	50	20	6.5	11	10.4	22	17	50	0.7	15	5	21,000	2	TS4SL	①TKY15W		
		R08005CA	●	5	80	50	26	6	13	9.5	25.4	20	60	1.1	15	3	19,000	2	TS4SL	①TKY15W		
		R10006DA	●	6	100	63	32	8	17	12.7	31.75	26	70	2.0	15	3	16,000	2	TS4SL	①TKY15W		
	R12507EA	●	7	125	63	40	10	56	15.9	38.1	-	80	2.8	15	2	14,000	3	TS4SL	①TKY15W			
	B	4.0   5.0	BXD4000-040A03RB	●	3	40	50	18	5.6	M8	8.4	16	-	32	0.3	15	9	29,000	1	TS4SL	①TKY15W	XDGT1550 PDFR-G
			-050A04RB	●	4	50	50	20	6.5	11	10.4	22	17	41	0.4	15	6	24,000	2	TS4SL	①TKY15W	
			-063A05RB	●	5	63	50	20	6.5	11	10.4	22	17	50	0.7	15	5	21,000	2	TS4SL	①TKY15W	
			R08005CB	●	5	80	50	26	6	13	9.5	25.4	20	60	1.1	15	3	19,000	2	TS4SL	①TKY15W	
R10006DB			●	6	100	63	32	8	17	12.7	31.75	26	70	2.0	15	3	16,000	2	TS4SL	①TKY15W		
R12507EB	●	7	125	63	40	10	56	15.9	38.1	-	80	2.8	15	2	14,000	3	TS4SL	①TKY15W				
BXD7000	A 0.8   3.0	BXD7000-050A02RA	●	2	50	50	18	5.6	9	8.4	16	14	41	0.4	21	9	22,000	2	TS5SL	②TKY25D	XDGT2206 PDFR-G	
		-063A03RA	●	3	63	50	20	6.5	11	10.4	22	17	45	0.5	21	7	19,000	2	TS5SL	②TKY25D		
		R08004CA	●	4	80	60	26	6	13	9.5	25.4	20	55	1.1	21	5	17,000	2	TS5SL	②TKY25D		
		R10005DA	●	5	100	63	32	8	17	12.7	31.75	26	70	1.8	21	4	14,000	2	TS5SL	②TKY25D		
		R12506EA	●	6	125	63	40	10	56	15.9	38.1	-	90	3.0	21	3	12,000	3	TS5SL	②TKY25D		
	B	4.0   5.0	BXD7000-050A02RB	●	2	50	50	18	5.6	9	8.4	16	14	41	0.4	21	9	22,000	2	TS5SL	②TKY25D	XDGT2206 PDFR-G
			-063A03RB	●	3	63	50	20	6.5	11	10.4	22	17	45	0.5	21	7	19,000	2	TS5SL	②TKY25D	
			R08004CB	●	4	80	60	26	6	13	9.5	25.4	20	55	1.1	21	5	17,000	2	TS5SL	②TKY25D	
			R10005DB	●	5	100	63	32	8	17	12.7	31.75	26	70	1.8	21	4	14,000	2	TS5SL	②TKY25D	
			R12506EB	●	6	125	63	40	10	56	15.9	38.1	-	90	3.0	21	3	12,000	3	TS5SL	②TKY25D	

Note) Arbor types for attachment to the D9 cutter dimension

Centering Location Diameter (D9)	ø16	ø22	ø25.4	ø31.75	ø38.1
Arbor Type	SM1, SMA	FMC, SM1	FMA, FMC	FMA, SMB	FMA, FMB SMB, SMC

Note 1) The maximum allowed revolutions are set to ensure tool and insert stability.

Note 2) When using the tool at high revolutions, ensure that the tool and arbor are correctly balanced.

Shank type



Fig. 1: Straight shank


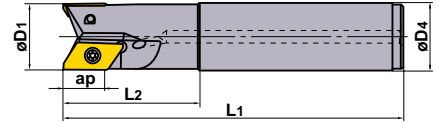


Fig. 2: Offset shank

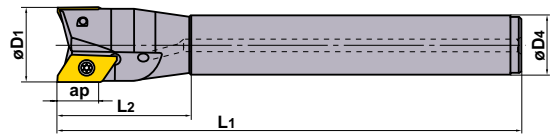

Right hand tool holder only.

Type	Insert Corner Re	Type	Order Number	Stock	Number of Teeth	Dimensions (mm)					Ramping Angle (°)	Max. Allowable Revolution (min <sup>-1</sup> )	Figure	① Clamp Screw	② Wrench	Insert	
						D1	ap	L1	L2	D4							
BXD4000	A 0.4   3.2	Standard	BXD4000R201SA20SA	●	1	20	15	110	35	20	28	15,000	1	TS4SL	⊙TKY15W	XDGT1550 PD○R-G○	
			252SA25SA	●	2	25	15	125	50	25	20	38,000	1	TS4SL	⊙TKY15W		
			282SA25SA	●	2	28	15	125	50	25	17	35,000	2	TS4SL	⊙TKY15W		
			322SA32SA	●	2	32	15	150	50	32	13	33,000	1	TS4SL	⊙TKY15W		
			352SA32SA	●	2	35	15	150	50	32	11	31,000	2	TS4SL	⊙TKY15W		
			403SA32SA	●	3	40	15	170	80	32	9	29,000	2	TS4SL	⊙TKY15W		
			403SA42SA	●	3	40	15	170	80	42	9	29,000	1	TS4SL	⊙TKY15W		
			Long	BXD4000R252SA25LA	●	2	25	15	170	80	25	20	38,000	1	TS4SL		⊙TKY15W
				322SA32LA	●	2	32	15	200	80	32	13	33,000	1	TS4SL		⊙TKY15W
	Extra long	BXD4000R282SA25ELA		●	2	28	15	220	50	25	17	35,000	2	TS4SL	⊙TKY15W		
		352SA32ELA	●	2	35	15	250	50	32	11	31,000	2	TS4SL	⊙TKY15W			
		403SA32ELA	●	3	40	15	250	65	32	9	29,000	2	TS4SL	⊙TKY15W			
	B 4.0   5.0	Standard	BXD4000R201SA20SB	●	1	20	15	110	35	20	28	15,000	1	TS4SL	⊙TKY15W	XDGT1550 PD○R-G○	
			252SA25SB	●	2	25	15	125	50	25	20	38,000	1	TS4SL	⊙TKY15W		
			282SA25SB	●	2	28	15	125	50	25	17	35,000	2	TS4SL	⊙TKY15W		
			322SA32SB	●	2	32	15	150	50	32	13	33,000	1	TS4SL	⊙TKY15W		
			352SA32SB	●	2	35	15	150	50	32	11	31,000	2	TS4SL	⊙TKY15W		
			403SA32SB	●	3	40	15	170	80	32	9	29,000	2	TS4SL	⊙TKY15W		
403SA42SB			●	3	40	15	170	80	42	9	29,000	1	TS4SL	⊙TKY15W			
Long			BXD4000R252SA25LB	●	2	25	15	170	80	25	20	38,000	1	TS4SL	⊙TKY15W		
			322SA32LB	●	2	32	15	200	80	32	13	33,000	1	TS4SL	⊙TKY15W		
	Extra long	BXD4000R282SA25ELB	●	2	28	15	220	50	25	17	35,000	2	TS4SL	⊙TKY15W			
352SA32ELB		●	2	35	15	250	50	32	11	31,000	2	TS4SL	⊙TKY15W				
403SA32ELB		●	3	40	15	250	65	32	9	29,000	2	TS4SL	⊙TKY15W				
BXD7000	A 0.8   3.0	Standard	BXD7000R251SA25SA	●	1	25	21	170	80	25	28	12,000	1	TS5S	⊙TKY25D	XDGT2206 PDFR-G○	
			321SA32SA	●	1	32	21	170	80	32	19	9,500	1	TS5S	⊙TKY25D		
			402SA42SA	●	2	40	21	170	80	42	13	28,000	1	TS5SL	⊙TKY25D		
	B 4.0   5.0	Long	BXD7000R251SA25SB	●	1	25	21	170	80	25	28	12,000	1	TS5S	⊙TKY25D	XDGT2206 PDFR-G○	
			321SA32SB	●	1	32	21	170	80	32	19	9,500	1	TS5S	⊙TKY25D		
			402SA42SB	●	2	40	21	170	80	42	13	28,000	1	TS5SL	⊙TKY25D		

Note 1) The maximum allowed revolutions are set to ensure tool and insert stability.

Note 2) When using the tool at high revolutions, ensure that the tool and arbor are correctly balanced.

Holder and insert corner radius combination


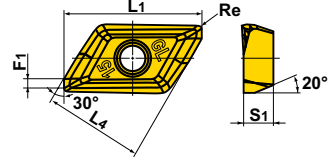

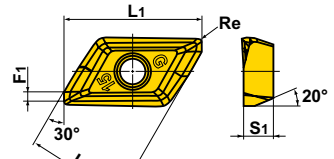

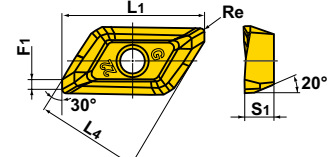
Holder	A Holder							B Holder	
	BXD4000R ○○○○○○○○○○ A	BXD4000R ○○○○○○○○○○ A					BXD4000R ○○○○○○○○○○ A	BXD4000R ○○○○○○○○○○ B	BXD7000R ○○○○○○○○○○ B
Applicable insert Corner R (Re)	R 0.4	R 0.8	R 1.2	R 1.6	R 2.0	R 3.0	R 3.2	R 4.0	R 5.0
	XDGT.....-G04 XDGT.....-GL04	XDGT.....-G08 XDGT.....-GL08	XDGT.....-G12	XDGT.....-G16	XDGT.....-G20	XDGT.....-G30	XDGT.....-G32	XDGT.....-G40	XDGT.....-G50

Note 1) Please only use the holder and insert corner radius combinations shown above.

Note 2) XDGT.....-GL08 and -G12 inserts are compatible only with the BXD4000R ○○○○○○○○○A type holder.

# Milling Cutters for Aluminum and Difficult-to-cut Materials

## Insert

Cutter Type	Shape	Order Number	Class	Honing	Stock			Dimensions (mm)					Geometry
					Coated		Carbide	L1	L4	S1	F1	Re	
					VP15TF	LC15TF	TF15						
BXD4000		<b>XDGT1550PDFR-GL04</b>	G	F	●			22	16	5	1.5	0.4	
		<b>1550PDFR-GL08</b>	G	F	●			22	16	5	1.1	0.8	
		<b>XDGT1550PDFR-G04</b>	G	F	●		●	22	16	5	1.5	0.4	
		<b>1550PDFR-G08</b>	G	F	●		●	22	16	5	1.1	0.8	
		<b>1550PDFR-G12</b>	G	F	●		●	22	16	5	0.7	1.2	
		<b>1550PDFR-G16</b>	G	F	●		●	22	16	5	0.4	1.6	
		<b>1550PDFR-G20</b>	G	F	●		●	21.7	16	5	0.2	2.0	
		<b>1550PDFR-G30</b>	G	F	●		●	20	16	5	0.6	3.0	
		<b>1550PDFR-G32</b>	G	F	●		●	20	16	5	0.4	3.2	
		<b>1550PDFR-G40</b>	G	F	●		●	19	16	5	0.5	4.0	
		<b>1550PDFR-G50</b>	G	F	●		●	18	16	5	0.4	5.0	
		<b>XDGT1550PDER-G04</b>	G	E	●			22	16	5	1.5	0.4	
		<b>1550PDER-G08</b>	G	E	●			22	16	5	1.1	0.8	
		<b>1550PDER-G12</b>	G	E	●			22	16	5	0.7	1.2	
		<b>1550PDER-G16</b>	G	E	●			22	16	5	0.4	1.6	
		<b>1550PDER-G20</b>	G	E	●			21.7	16	5	0.2	2.0	
	<b>1550PDER-G30</b>	G	E	●			20	16	5	0.6	3.0		
	<b>1550PDER-G32</b>	G	E	●			20	16	5	0.4	3.2		
	<b>1550PDER-G40</b>	G	E	●			19	16	5	0.5	4.0		
	<b>1550PDER-G50</b>	G	E	●			18	16	5	0.4	5.0		
BXD7000		<b>XDGT2206PDFR-G08</b>	G	F	□		●	30	22	6.35	2.0	0.8	
		<b>2206PDFR-G16</b>	G	F	□		●	30	22	6.35	1.2	1.6	
		<b>2206PDFR-G20</b>	G	F	□		●	30	22	6.35	0.8	2.0	
		<b>2206PDFR-G30</b>	G	F	□		●	29	22	6.35	0.6	3.0	
		<b>2206PDFR-G40</b>	G	F	□		●	27.5	22	6.35	0.9	4.0	
		<b>2206PDFR-G50</b>	G	F	□		●	27	22	6.35	0.4	5.0	




● : Inventory maintained. □ : Non stock, produced to order only.




## Recommended Cutting Conditions




Work Material	Hardness	Insert Grade	Cutting Speed (m/min)	Feed per Tooth (mm/tooth)
<b>N</b> Aluminum Alloy	—	<b>LC15TF</b> <b>TF15</b>	1000 (200–3000)	0.3 (0.1–0.5)
<b>S</b> Titanium Alloy	—	<b>VP15TF</b>	40 (30–60)	0.1 (0.1–0.3)
Heat-resistant Alloy (Inconel etc.)	—	<b>VP15TF</b>	30 (20–40)	0.15 (0.1–0.2)
<b>M</b> Stainless Steel (JIS SUC304 etc.)	≤270HB	<b>VP15TF</b>	140 (120–160)	0.2 (0.1–0.3)
<b>P</b> Mild Steel (JIS SS400, S10C etc.)	≤180HB	<b>VP15TF</b>	180 (150–200)	0.15 (0.1–0.2)
	≤280HB	<b>VP15TF</b>	150 (120–200)	0.15 (0.1–0.2)
		<b>VP15TF</b>	140 (120–160)	0.15 (0.1–0.2)
Carbon Steel, Alloy Steel (S45C, SCM440 etc.)	280–350HB	<b>VP15TF</b>	140 (120–160)	0.15 (0.1–0.2)
Hardened Steel (JIS SKD etc.)	40–60HRC	<b>VP15TF</b>	70 (50–100)	0.1 (0.05–0.15)

- Figures above are a guide lines for optimum general use. They may vary depending on machine rigidity, work clamping and length of tool overhang.
- When using ø20 shank type, set the table feed at under 0.05mm/tooth and maintain observation during cutting.
- Please adjust the table feed when using long- and extra-long-shank types.
- Please adjust the table feed when ramp machining (Recommended feed: 0.05mm/tooth under).

## Application Examples

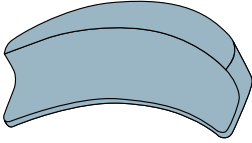Holder		BXD4000R202SA20SA (φ31.75)	BXD4000R0204(φ50.8)	BXD7000R08004CA
Insert (Grade)		XDGT1550PDFR-GL04(TF15)	XDGT1550PDFR-G08(TF15)	XDGT2206PDFR-G08(TF15)
Workpiece		JIS A6061 	JIS A7075-T7 	JIS A5052 
Machine		BT40	M/C (M/C (BT50 30KW))	M/C (BT50 75KW)
Cutting Conditions	Revolution (min <sup>-1</sup> )	10,000	10,000	15,000
	Cutting Speed (m/min)	997	1,596	3,768
	Depth of Cut (mm)	4.5	5.1	6
	Width of Cut (mm)	32	50.8	70
	Feed per Tooth (mm/tooth)	0.38	0.20	0.33
	Chip Discharge (cc/min)	1,077	2,064	8,400
Result		The spindle load reading of the <b>G</b> breaker was only 60%, but the <b>GL</b> breaker was even lower at 40%, therefore demonstrating lower cutting resistance.	<b>BXD</b> achieved more than 12 times longer tool life.	No vibration and no insert fracturing.

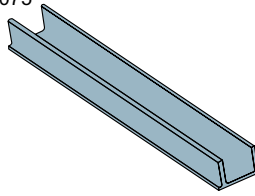Holder		BXD4000R252SA25SA	BXD4000R322SA325SA	BXD4000R252SA25SA
Insert (Grade)		XDGT1550PDFR-G20(TF15)	XDGT1550PDFR-G30(TF15)	XDGT1550PDFR-G04(TF15)
Workpiece		JIS A7075-T651 	JIS A7075 	Aluminum alloy 
Machine		M/C (BT40 30KW)	M/C (BT50 20KW)	M/C (BT50 22KW)
Cutting Conditions	Revolution (min <sup>-1</sup> )	30,000	7,000	7,500
	Cutting Speed (m/min)	2,360	703	589
	Depth of Cut (mm)	16	5	3
	Width of Cut (mm)	16	32	25
	Feed per Tooth (mm/tooth)	0.23	0.16	0.10
	Chip Discharge (cc/min)	3,584	358	113
Result		<b>BXD</b> obtained excellent wall surface accuracy.	<b>BXD</b> achieved more than 10 times longer tool life.	<b>BXD</b> displayed low resistance and achieved long tool life.

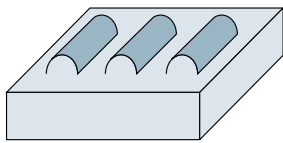Holder		BXD4000-063A05RA	BXD4000-050A04RA	BXD4000R252SA25SA
Insert (Grade)		XDGT1550PDFR-G04(LC15TF)	XDGT1550PDFR-G08(LC15TF)	XDGT1550PDFR-G08(VP15TF)
Workpiece		JIS A5078 	JIS A5052 	JIS SUS304 
Machine		M/C (BT40 11KW)	M/C (BT40 11KW)	M/C (BT40 18.5KW)
Cutting Conditions	Revolution (min <sup>-1</sup> )	5,600	12,000	1,783
	Cutting Speed (m/min)	1,108	1,884	140
	Depth of Cut (mm)	4	2	7
	Width of Cut (mm)	1.5	25	20
	Feed per Tooth (mm/tooth)	0.34	0.52	0.1
	Chip Discharge (cc/min)	57	1,250	50
Result		LC15TF produced a superior surface finish compared to the competitors non-coated carbide grade that generated a dull surface finish.	Less welding and longer tool life after more than 1 hour duration of machining time with air blow.	The tool could be used on a smaller BT40 type spindle machining center because of the low cutting resistance of inserts.

# BXD

## Application Examples

Holder		BXD4000R12507EA		Competitor's
Insert (Grade)		XDGT1550PDER-G16(VP15TF)		
Workpiece				
Machine		M/C (BT50 15KW)	M/C (BT50 15KW)	
Cutting Conditions	Revolution (min <sup>-1</sup> )	102	38	
	Cutting Speed (m/min)	40	15	
	Depth of Cut (mm)	12	5	
	Width of Cut (mm)	110	110	
	Feed per Tooth (mm/tooth)	1.10	0.06	
	Chip Discharge (cc/min)	94	11	
Result		<p>Normal chips 10mm</p> <ul style="list-style-type: none"> <li>Improved chip control.</li> <li>Lower cutting resistance.</li> <li>Excellent surface accuracy and finish.</li> </ul>	<p>Irregular chips 10mm</p>	

Holder		BXD4000-050A04RA	
Insert (Grade)		XDGT1550PDER-G04(VP15TF)	
Workpiece			
Machine		M/C (BT50 11KW)	
Cutting Conditions	Revolution (min <sup>-1</sup> )	1,230	
	Cutting Speed (m/min)	193	
	Depth of Cut (mm)	5	
	Width of Cut (mm)	5	
	Pick feed (mm)	5	
	Feed per Tooth (mm/tooth)	0.10	
Result		<ul style="list-style-type: none"> <li>Wall surface accuracy is 0.005mm.</li> <li>Lower cutting resistance and higher surface finishes.</li> </ul>	

Please note that the machining performed in the application examples is dependent on the rigidity of the machine used and the rigidity of the workpiece and clamping.

## Operational Guidance

- Use only prescribed inserts and parts.
- The maximum allowed revolutions are set to ensure tool and insert stability.
- Ensure that the cutter operates under the maximum allowable revolution. Even when operating under the maximum allowable revolution, if the spindle revolution is equal to or higher than the values shown in the following table, we recommend that the balance quality grade (with arbor) conforms to G40 or higher based on "JIS B 0905".

Cutting Edge Diameter (mm)	Type	ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125
Revolution (min <sup>-1</sup> )	BXD4000	12,000	9,500	7,600	6,000	4,800	3,800	3,000	2,400
	BXD7000	—	—						

- Please use a special clamping bolt when using the arbor type with through coolant holes.
- Cutting tools have sharp cutting edges and handling them with bare hands may cause injuries. Always wear protectors such as gloves in handling indexable inserts.
- Always apply the recommended clamp torque values as shown below.

BXD4000 : 4–5N·m (41–51kgf·cm)  
 BXD7000 : 7–8N·m (71–82kgf·cm)

### For Your Safety

- Don't handle inserts and chips without gloves.
- Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage.
- Please use safety covers and wear safety glasses.
- When using compounded cutting oils, please take fire precautions.
- When attaching inserts or spare parts, please use only the correct wrench or spanner.
- When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

## MITSUBISHI MATERIALS CORPORATION



The Scope of the Registration: Design, Development and Production of Cemented Carbide Tools and Carbide Blanks



The Scope of the Registration: Design, Development and Production of Cutting Tools, Wear-resistant Tools, Rock Drilling Tools, Cemented Carbide Blanks and Coated Products



### MITSUBISHI MATERIALS CORPORATION Area Marketing & Operations Dept.

KFC bldg., 8F, 1-6-1, Yokoami, Sumida-ku, Tokyo 130-0015, Japan  
 TEL +81-3-5819-8772 FAX +81-3-5819-8774

### MMC HARTMETALL GmbH

Comeniusstr.2, 40670, Meerbusch GERMANY  
 TEL +49-2159-9189-0 FAX +49-2159-918966

### MITSUBISHI MATERIALS U.S.A. CORPORATION Headquarters

17401, Eastman Street, Irvine, California, 92614, USA  
 TEL +1-949-862-5100 FAX +1-949-862-5180

### MMC METAL SINGAPORE PTE LTD.

10, Arumugam Road, #04-00 Lion Industrial Bldg., 409957, SINGAPORE  
 TEL +65-6743-9370 FAX +65-6749-1469

Mitsubishi Carbide Home page : <http://www.mitsubishicarbide.com>

(Tools specifications subject to change without notice.)