


High Feed Finish Milling Cutter

FMAX

New
Product

**Feed Maximum (FMAX)
milling cutter for ultra efficient
and accurate finishing.**

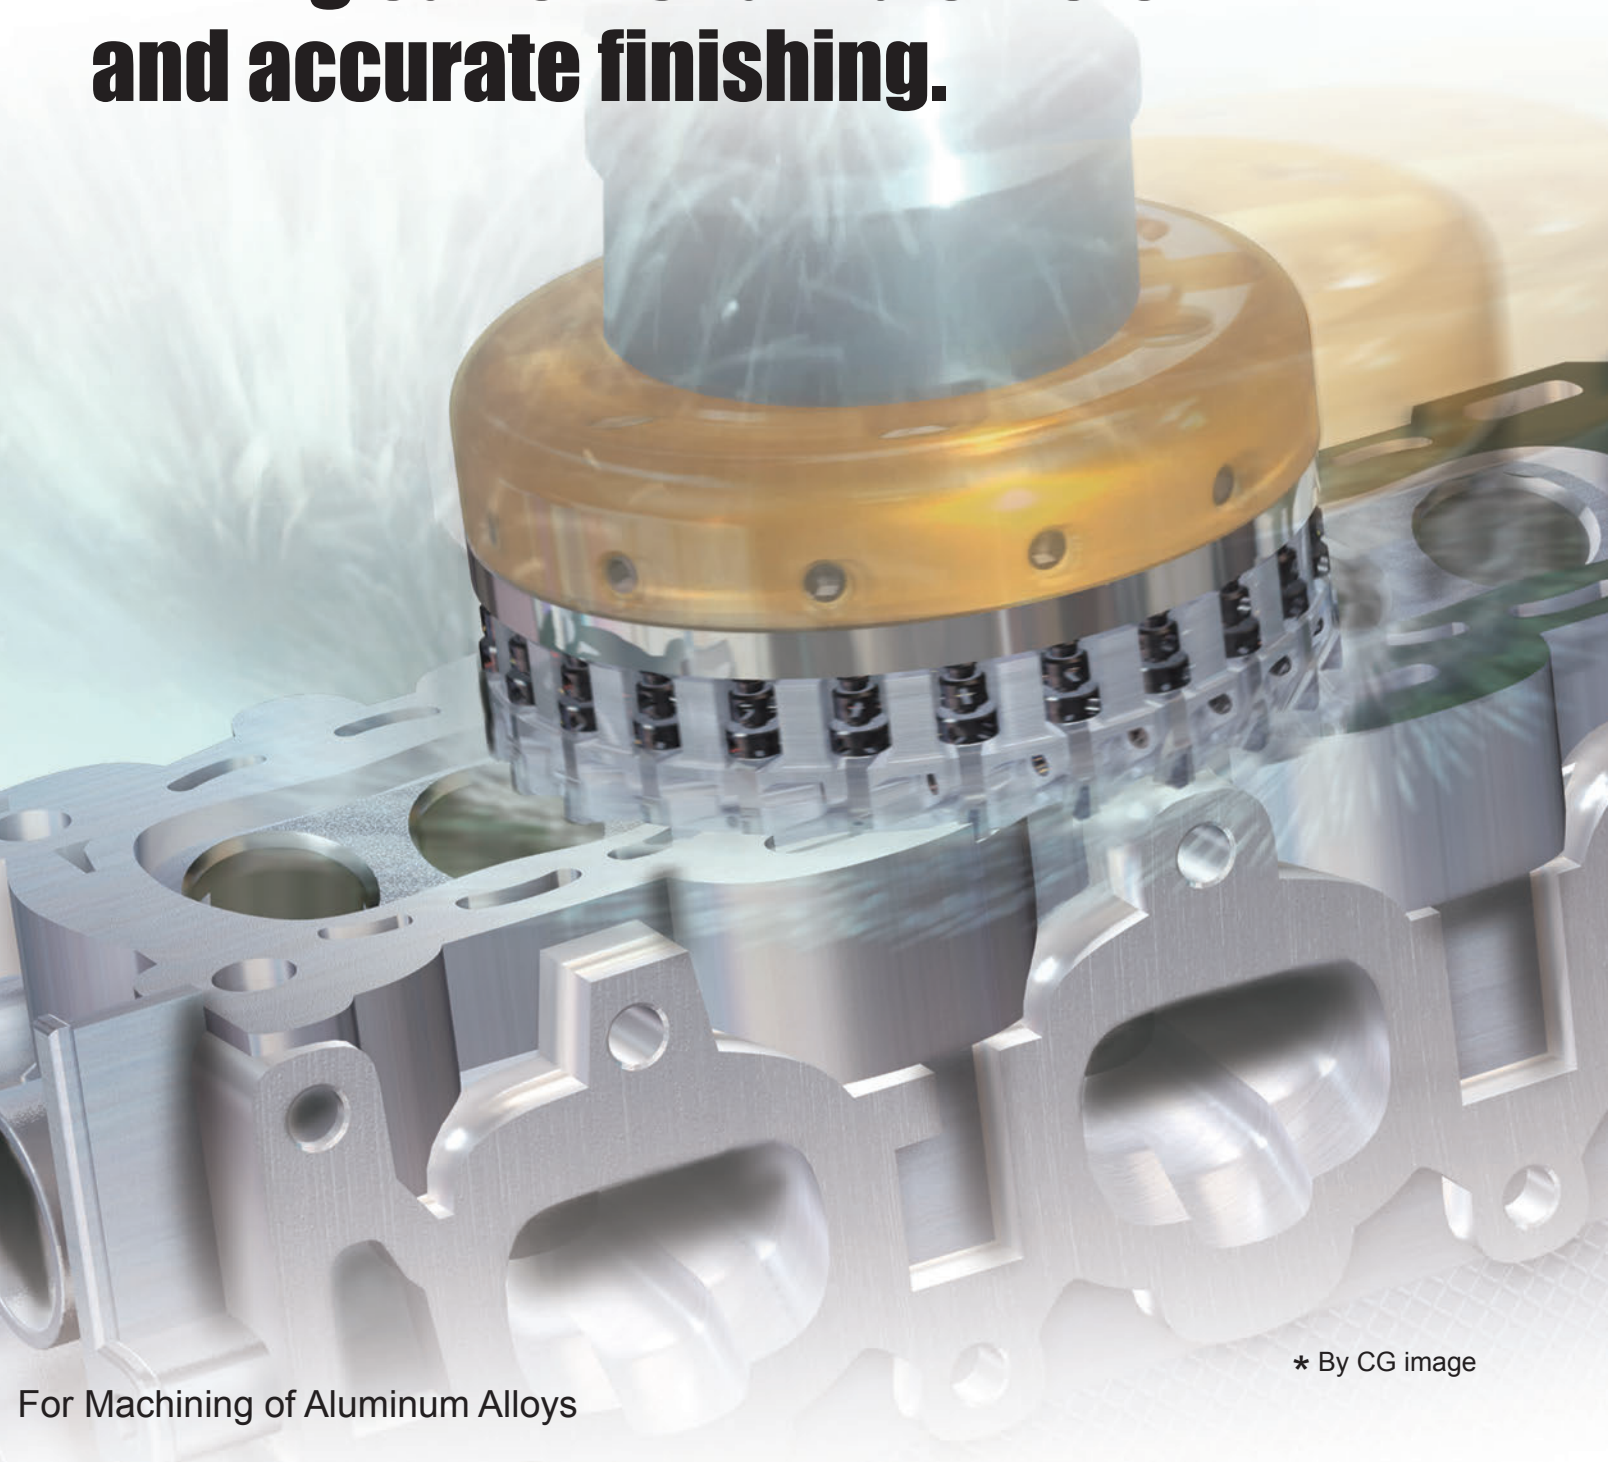

* By CG image

For Machining of Aluminum Alloys


High Feed Finish Milling Cutter

FMAX

Ultra High Efficiency Machining


The ultra fine pitch design is ideal for high efficiency machining ($IPM \geq 787$).

Internal coolant and a special chipbreaker wall (body protector) provides ideal chip discharge performance.

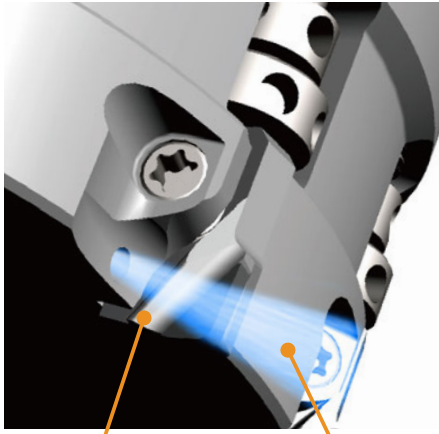

Body Protector

Internal Coolant

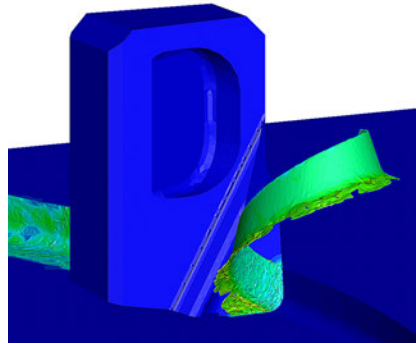


*Graphical representation.

The body protector on the rake face forms chip shapes ideal for disposal and disperses them away from the body. Internal coolant also aids this process. The body is compatible with through coolant arbors.

Designed for High Speeds

Anti fly dovetail clamping mechanism.




Dovetail Clamp



Angled Face

Light Weight, High Rigidity Body

A special 2-piece body that combines alloy steel and aluminum to provide rigidity and light weight.

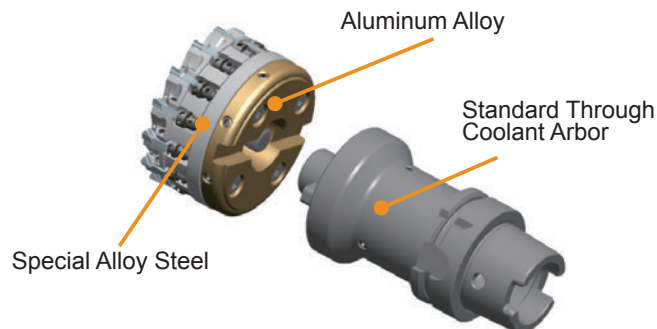

Aluminum Alloy

Standard Through Coolant Arbor

Special Alloy Steel


High Precision, Easy Setting

The combination of both a large and micro screw provides precise run-out adjustment of inserts; (.0002" or better).




Large Adjustment Screw

Micro Adjustment Nut

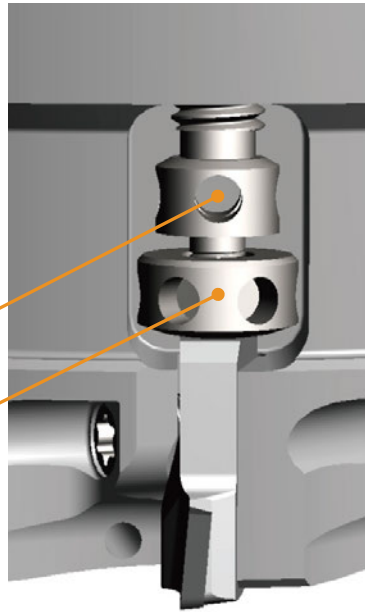

Inserts, GOER1408PXFR2 MD2030

New PCD Grade
for Machining
Aluminum Alloy

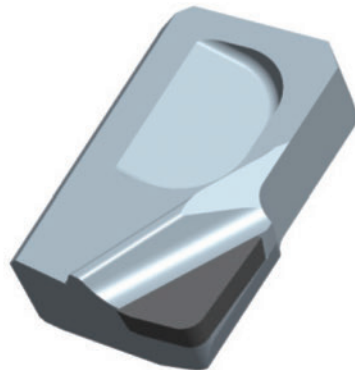

GAMP 5°

High Feed Finish Milling Cutter

FACE MILLING <HIGH FEED FINISHING>



FMAX

P M K **N** S H



Fig.1

ø3.000"
ø4.000"
ø80mm






Fig.2

ø5.000"
ø100mm
ø125mm

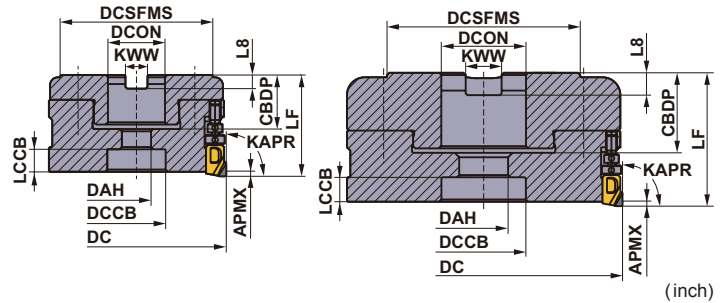

DC=Inch size, DCON=Inch size

KAPR : 90° GAMP : +5°
CH : 0° GAMF : 0°
With Coolant hole

DC	Order Number	Stock	*2 No.T	LF	DCON	WT (lbs)	APMX	RPMX (min ⁻¹)	Fig.
3.000	FMAXUR0310C	●	10	1.772	1.000	2.2	.079	24500	1
3.000	FMAXUR0314C	●	14	1.772	1.000	2.1	.079	24500	1
4.000	FMAXUR0412D	●	12	1.969	1.250	4.2	.079	22000	1
4.000	FMAXUR0418D	●	18	1.969	1.250	4.1	.079	22000	1
5.000	FMAXUR0516E	●	16	2.362	1.500	7.6	.079	19600	2
5.000	FMAXUR0524E	●	24	2.362	1.500	7.5	.079	19600	2

*1 .079" or less is the recommended maximum depth of cut for ultra high efficiency machining.
*2 Number of Teeth

Metric Standard

For inch arbors

DC=mm size, DCON=Inch size

KAPR : 90° GAMP : +5°
CH : 0° GAMF : -5°—0°
With Coolant hole

DC	Order Number	Stock	*2 No.T	LF	DCON	DCON (inch)	WT (kg)	APMX	RPMX (min ⁻¹)	Fig.
80	FMAXR08010C	★	10	45	25.4	1.000"	1.11	2	24500	1
80	FMAXR08014C	★	14	45	25.4	1.000"	1.09	2	24500	1
100	FMAXR10012D	★	12	50	31.75	1.250"	1.85	2	22000	2
100	FMAXR10018D	★	18	50	31.75	1.250"	1.81	2	22000	2
125	FMAXR12516E	★	16	60	38.1	1.500"	3.33	2	19600	2
125	FMAXR12524E	★	24	60	38.1	1.500"	3.27	2	19600	2

*1 .079" or less is the recommended maximum depth of cut for ultra high efficiency machining.
*2 Number of Teeth

● : Inventory maintained. ★ : Inventory maintained in Japan.

Mounting Dimension

(inch)








DCON	Tool Holder Type	DC	CBDP	DAH	DCCB	LCCB	DCSFMS	KWW	L8	KWL
1.000	FMAXUR03	3.000	.945	.539	1.024	.394	2.677	.375	.219	—
1.250	FMAXUR04	4.000	1.260	.669	1.260	.354	3.465	.500	.281	—
1.500	FMAXUR05	5.000	1.417	.787	1.496	.433	3.465	.625	.375	4.409

(mm)

DCON	DCON (inch)	Tool Holder Type	DC	CBDP	DAH	DCCB	LCCB	DCSFMS	KWW	L8	KWL
25.4	1.000"	FMAXR08	80	24	13	26	10	68	9.5	6	—
31.75	1.250"	FMAXR10	100	32	17	32	9	79	12.7	8	90
38.1	1.500"	FMAXR12	125	36	22	38	11	88	15.9	10	112

Spare Parts








(inch)

Tool Holder Type	Insert Clamp Screw	Micro Adjustment Nut	Large Adjustment Screw	Balance Adjustment Screw	Cutter Clamp Bolt	Wrench T10	Wrench ø.098"
							
FMAXUR03	TSS04505S	KSN2	KSS2	HSS05005G	HSCXU50012H	TKY10T	RKY25S
FMAXUR04	TSS04505S	KSN2	KSS2	HSS06006G	HSCXU62514H	TKY10T	RKY25S
FMAXUR05	TSS04505S	KSN2	KSS2	HSS08008G	HSCXU75017H	TKY10T	RKY25S

* Clamp Torque (lbf-in) : TSS04505S=31

* Refer to the instruction manual included in the cutter body for how to locate the insert and adjust the run-out.

(mm)

Tool Holder Type	Insert Clamp Screw	Micro Adjustment Nut	Large Adjustment Screw	Balance Adjustment Screw	Cutter Clamp Bolt	Wrench T10	Wrench ø2.5
							
FMAXR08	TSS04505S	KSN2	KSS2	HSS05005G	HSCX12030H	TKY10T	RKY25S
FMAXR10	TSS04505S	KSN2	KSS2	HSS06006G	HSCX16035H	TKY10T	RKY25S
FMAXR12	TSS04505S	KSN2	KSS2	HSS08008G	HSCX20035H	TKY10T	RKY25S


* Clamp Torque (N·m) : TSS04505S=3.5


* Refer to the instruction manual included in the cutter body for how to locate the insert and adjust the run-out.

High Feed Finish Milling Cutter

Inserts

(inch)

Shape	Order Number	Class	Stock	L	W1	S	BS	RE
	GOER1408PXFR2	MD2030	●	.551	.354	.165	.079	.031

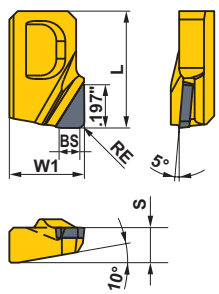


● : Inventory maintained. (PCD inserts are available in 1 piece in one case)


Features of New PCD Grade MD2030

Diamond Sintered Segment Containing Ultra Microparticle Diamond

- Optimized grade for milling.
- Improved fracture resistance during interrupted machining.
- Offers a highly stable cutting edge that prevents burrs and gives an excellent surface finish.

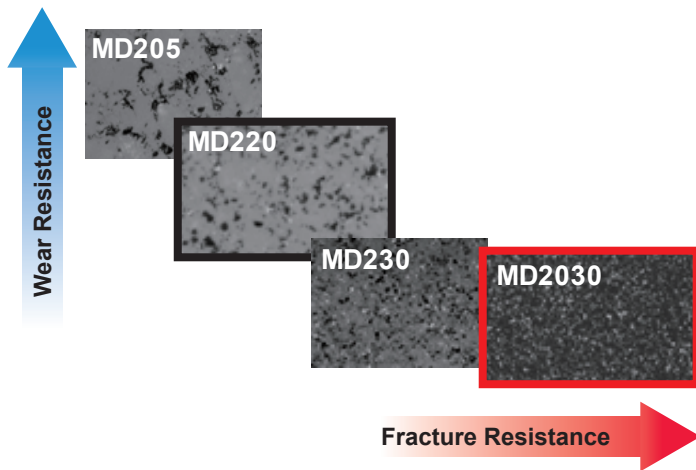

Bond of Diamond Particles

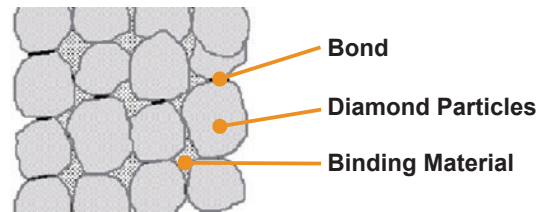

Diamond Particles: Give a highly stable cutting edge performance because of the strong bonding.


Recommended Cutting Conditions

(inch)


Work Material	Characteristics	Grade	vc (SFM)	ae	ap	fz (IPT)
N Aluminum Alloy	Si <12.5%	MD2030	8200 (6560–9840)	≤.008 DC	≤.079 (.020–.118)	.003 (.002–.008)
				≤.020 DC	≤.079 (.020–.098)	
				≤.031 DC	≤.079 (.020–.079)	
	Si ≥12.5%	MD2030	1970 (1310–2625)	≤.008 DC	≤.079 (.020–.118)	.003 (.002–.008)
				≤.020 DC	≤.079 (.020–.098)	
				≤.031 DC	≤.079 (.020–.079)	

* Adjust the depth of cut depending on the width of cut.



Finished Surface Roughness (Rz)

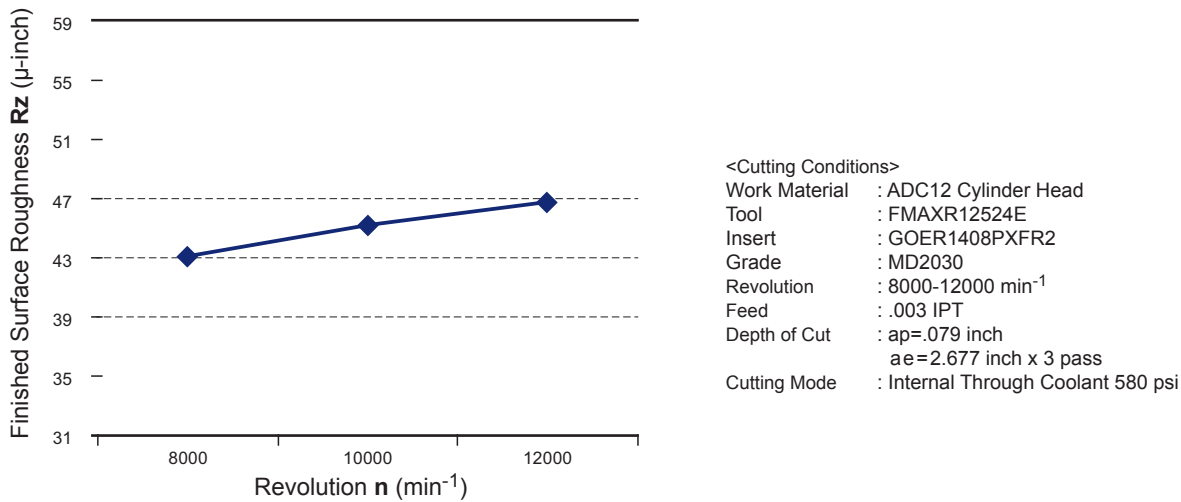

Effective Chip Disposal Range

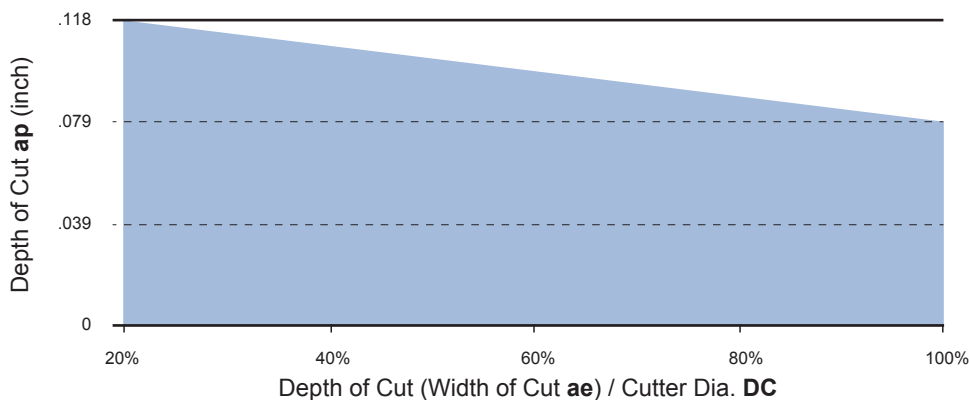

Application Examples

Cutter Body		FMAXR10018D	FMAXR08014C
Insert (Grade)		GOER1408PXFR2 (MD2030)	GOER1408PXFR2 (MD2030)
Workpiece		Aluminum Alloy 	Aluminum Alloy 
Cutting Conditions	Revolution (min ⁻¹)	8000	8000
	Cutting Speed (SFM)	8245	6600
	Feed (IPT)	.008	.005
	Table Feed (IPM)	1134	591
	Depth of Cut (inch)	.059	.098
	Width of Cut (inch)	1.969	.787
Cutting Mode		Wet Cutting	Wet Cutting
Machine		Horizontal Type	Horizontal Type
Results		Increased efficiency with a table feed increase x 2.6, FMAX achieved good surface finishes and increased machining stability.	Increased efficiency with a table feed increase x 2.2, FMAX achieved good surface finishes and increased machining stability.

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MITSUBISHI MATERIALS U.S.A. CORPORATION

Customer Service : 800-523-0800
 Technical Service : 800-486-2341

LOS ANGELES HEAD OFFICE
 11250 Slater Avenue, Fountain Valley, CA 92708
 TEL : 714-352-6100 FAX : 714-668-1320

CHICAGO OFFICE
 1314B North Plum Grove Road, Schaumburg, IL 60173
 TEL : 847-252-6300 FAX : 847-519-1732

TORONTO OFFICE
 3535 Laird Road, Units 15&16, Mississauga, Ontario, L5L 5Y7, Canada
 TEL : 905-814-0240 FAX : 905-814-0245

MMC METAL DE MEXICO, S.A. DE C.V.
 Av. La Cañada No.16, Parque Industrial Bernardo Quintana,
 El Marques, Queretaro, CP76246, Mexico
 TEL : +52-442-221-6136 FAX : +52-442-221-6134

URL : <http://www.mitsubishicarbide.com>
 (Tools specifications subject to change without notice.)