

Expanded
New Grade

Solid Carbide Drill

MHE Drill for Wheel Hubs



Unique design provides superior hole accuracy for shallow hole drilling.

**Effective drilling of hub bolt holes can be achieved.
Additional new grade DP3020 achieved long tool life!**

Solid Carbide Drill


MHE Drill for Wheel Hubs

Outline


For machining of the bolt holes of hubs, general-purpose drills are widely used. However, these are not highly productive due to the following problems.

- Chips elongate and damage the periphery of drilled holes and lead to poor surface finishes.
- Plastic deformation can occur leading to a work hardened layer generating in the wall of the hole. This can result in a poor press fitting of the hub bolts.
- Due to poor surface finish, a reaming operation maybe required to finish the holes.

The MHE solid carbide drill overcomes the above problems as it exhibits excellent chip control and offers efficient, high precision drilling due to the use of low resistance cutting edges and low helix angle.

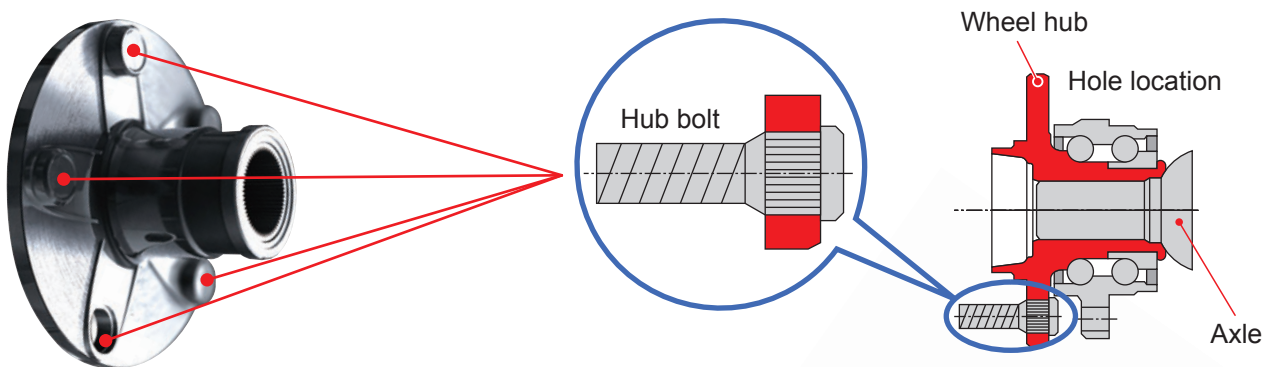


Features

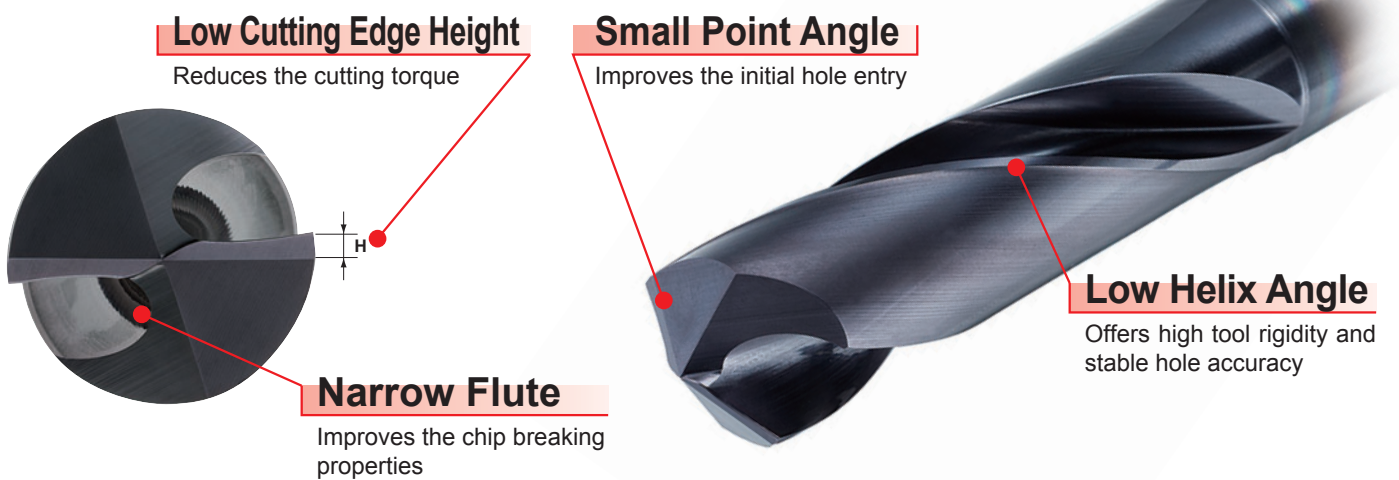

Low Cutting Edge Height

MHE Drill

WSTAR Drill

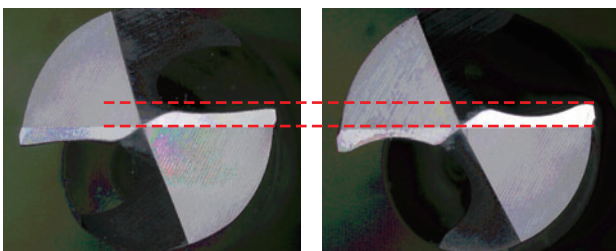


Reduces cutting torque

Narrow Flute

MHE Drill


WSTAR Drill

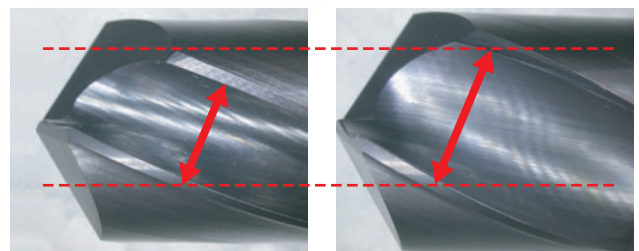

Finely breaks up chips

MHE Drill for Wheel Hubs

Straight Type

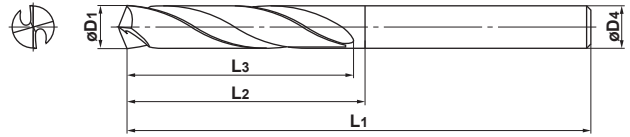

Dimensions

Drill Dia. D1 (mm)	Stock		Dimensions (mm)		
	DP3020	VP15TF	L3	L1	L2
10.0—10.2	◇	◇	43	87	43
10.2—10.5	◇	◇	43	87	43
10.5—10.7	◇	◇	43	87	43
10.7—11.0	◇	◇	47	93	47
11.0—11.2	◇	◇	47	93	47
11.2—11.5	◇	◇	47	93	47
11.5—11.9	◇	◇	47	93	47
11.9—12.0	◇	◇	51	100	51
12.0—12.5	◇	◇	51	100	51
12.5—13.0	◇	◇	51	100	51

Drill Dia. D1 (mm)	Stock		Dimensions (mm)		
	DP3020	VP15TF	L3	L1	L2
13.0—13.5	◇	◇	54	104	54
13.5—14.0	◇	◇	54	104	54
14.0—14.2	◇	◇	56	104	56
14.2—14.5	◇	◇	56	108	56
14.5—15.0	◇	◇	56	108	56
15.0—15.5	◇	◇	58	112	58
15.5—16.0	◇	◇	58	112	58
16.0—16.5	◇	◇	60	116	60
16.5—17.0	◇	◇	60	116	60
17.0—17.5	◇	◇	62	119	62
17.5—18.0	◇	◇	62	119	62

◇ Made to order product.

Product Range

Drill dia. : $\varnothing 10 - \varnothing 18$ mm

Drilling depth: $L/D \leq 1$ (L: hole depth; D: drill dia.)

Dimensions : Flute length is less than 4 times the drill diameter; Shank length will be determined based on present standards.

Tool grade : DP3020, VP15TF


Note) Contact Mitsubishi Materials for any geometry that is not shown above (e.g. different diameters and flute lengths can be made to order).

Order Number

When placing an order clearly indicate the following information.

Drill dia. (D1), Overall length (L1), Shank dia. (D4)

Ex)

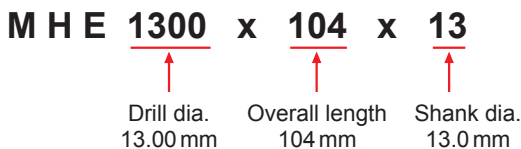


- The flute length will be determined by Mitsubishi Materials.
- Specify the hole diameter (including the hole tolerance) when placing an order.

Notes When Regrinding and Recoating the Drill

- When carrying out regrinding, it is necessary to recoat the drill to maintain tool life.
- When requesting regrinding and recoating of the drill, contact Mitsubishi Materials sales staff.

Step Type

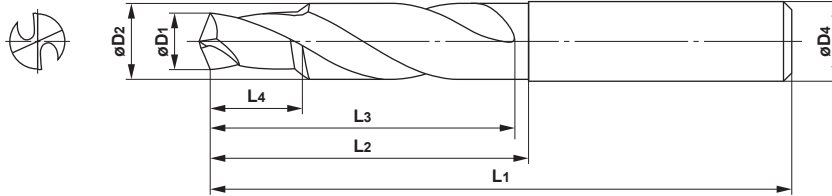

Dimensions

Drill Dia. D1 (mm)	Stock		Dimensions (mm)					
	DP3020	VP15TF	D2	L4	L3	L1	L2	D4
10	◇	◇	16	15	50	100	50	16
11	◇	◇	17	20	55	110	55	17
12	◇	◇	18	20	55	110	55	18
13	◇	◇	18	20	55	110	55	18
14	◇	◇	18	20	55	110	55	18

◇ : Made to order product.

Chamfer Diameter Reference Range

 : Applicable Range

Max. Chamfer Cutting Edge Dia. (mm)	Drill Dia. D1 (mm)	Chamfer Cutting Edge Dia. D2 (mm)								
		10	11	12	13	14	15	16	17	18
16	10									
17.6	11									
19.2	12									
20	13									
20	14									
20	15									
20	16									
20	17									

Step Length Range

 : Applicable Range

Drill Dia. D1 (mm)	Step Length L4 (mm)				
	10	15	20	25	30
10					
11					
12					
13					
14					
15					
16					
17					

Flute Length Range

 : Applicable Range

Drill Dia. D1 (mm)	Flute Length L3 (mm)				
	45	50	55	60	65
10					
11					
12					
13					
14					
15					
16					
17					

Order Number

When placing an order clearly indicate the following information.

Drill dia. (D1), Chamfer dia. (D2), Overall length (L1),
Shank dia. (D4)

Ex)

M H E 1400 x 1800 x 110 x 18

Drill dia. 14.00mm Chamfer dia. 18.00mm Overall length 110mm Shank dia. 18.0mm

- The flute length will be determined by Mitsubishi Materials.
- Specify the hole diameter (including the hole tolerance) when placing an order.

- Notes
1. These products are made to order.
 2. Specify the hole diameter (including the hole tolerance) when placing an order.

Product Range

Drill dia. D1: $\phi 10 - \phi 18$ mm

Chamfer dia. D2: $D2/D1 \leq 1.6$ and up to $\phi 18$ mm

Overall length L1 : To be determined based on the straight type drill.

If the chamfer diameter is $\phi 16$ mm, the maximum overall length is 112 mm.

Shank dia. D4 : Same as the chamfer diameter up to $\phi 16$ mm.

Increases in 0.5 mm increments for the diameter larger than $\phi 16$ mm.


Tool grade : DP3020, VP15TF

Notes When Regrinding and Recoating the Drill

- When carrying out regrinding, it is necessary to recoat the drill to maintain tool life.
- When requesting regrinding and recoating of the drill, contact Mitsubishi Materials sales staff.

Cutting Performance

Hole Accuracy

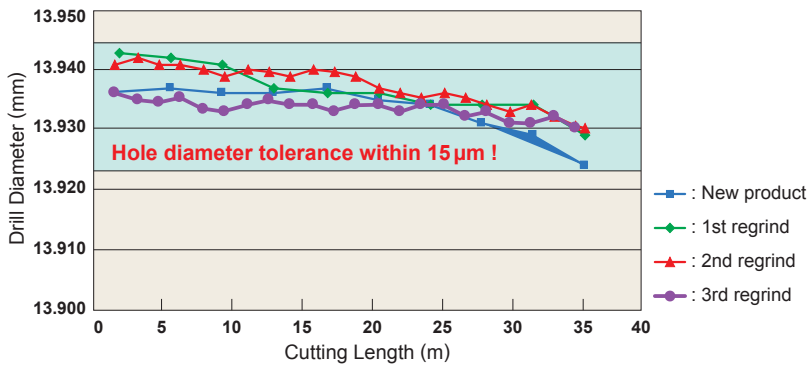

<Cutting Conditions>

Workpiece: JIS S53C Cutting speed: 60 m/min Feed: 0.15 mm/rev
 Hole depth: 6 mm Coolant: W.S.O.



Chip Geometry



Chip breaking properties
 The workpiece surface is not damaged due to the fine chips that were generated.

Result of Reducing the Cutting Torque

Prevents the generation of high cutting temperatures and the formation of the work hardened layer.

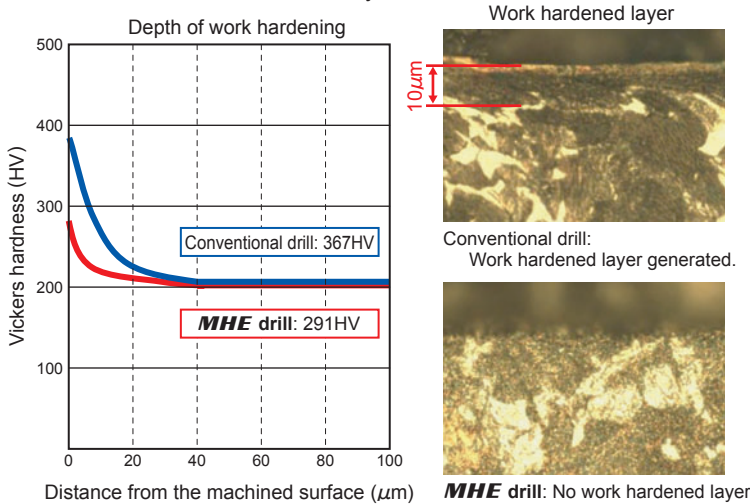


Conventional drill:
 Work hardened layer generated.



MHE drill: No work hardened layer

The **MHE** drill can prevent the formation of a work hardened layer (that usually cause tool damage), which makes it possible to produce high quality products.

Oversize Comparison

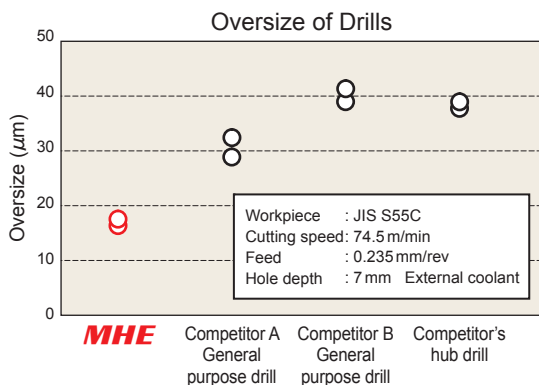

Workpiece : JIS S53C
 Cutting speed : 74.5 m/min
 Feed : 0.235 mm/rev
 Hole depth : 7 mm External coolant

Recommended Cutting Conditions





Work Material	Hardness	φ10.0—φ18.0 mm	
		Cutting Speed (m/min)	Feed (mm/rev)
P Carbon Steel	180—280HB	75 (60—90)	0.25 (0.15—0.30)




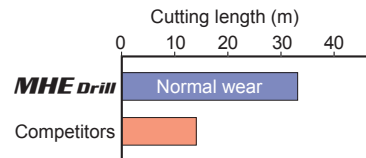
(Note) The above cutting conditions should be used as a guide and need to be adjusted according to the machine rigidity, workpiece clamping and shape.

Due to reduced oversize, the **MHE** drill can produce holes without reaming.

MHE Drill for Wheel Hubs

Application Examples

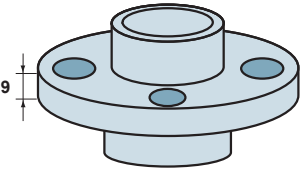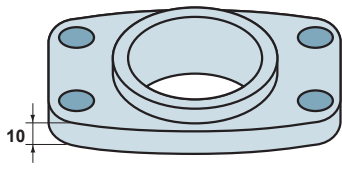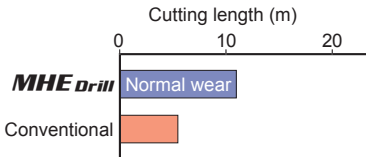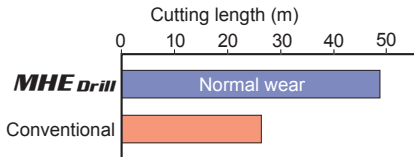Tool		MHE 13.93 x 115 x 14 (DP3020)	MHE 10.8 x 93 x 10.8 (DP3020)
Workpiece		Carbon Steel (JIS S55C) 	Carbon Steel (JIS S55C) 
Component		Inner face of hub	Outer face of hub
Cutting Conditions	Cutting Speed (m/min)	70	70
	Feed (mm/rev)	0.25	0.2
	Revolution (min ⁻¹)	1600	2050
Coolant		W.S.O.	W.S.O.
Machine Type		Machining centre	Machining centre
Results			

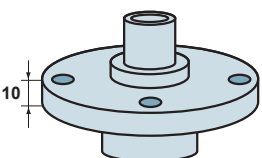Tool		MHE 13.93 x 104 x 14 (VP15TF)	MHE 13.93 x 104 x 14 (VP15TF)
Workpiece		Carbon Steel (JIS S55C) 	Carbon Steel (JIS S55C) 
Component		Inner face of hub	Inner face of hub
Cutting Conditions	Cutting Speed (m/min)	80	60
	Feed (mm/rev)	0.3	0.15
	Revolution (min ⁻¹)	1800	1400
Coolant		W.S.O.	W.S.O.
Machine Type		Machining centre	Machining centre
Results			

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc. ●Grinding or heating of cutting tools produces dust and mist. Inhaling large amount of dust or contacting with eyes and skins may harm your body.

MITSUBISHI MATERIALS CORPORATION

MITSUBISHI MATERIALS CORPORATION

Area Marketing & Operations Dept.

KFC bldg., 8F, 1-6-1, Yokoami, Sumida-ku, Tokyo 130-0015, Japan

TEL +81-3-5819-8772 FAX +81-3-5819-8774

Mitsubishi Carbide Home page : <http://www.mitsubishicarbide.com>

(Tools specifications subject to change without notice.)